

| Panel Light



60X60 SQUARE PANELS RANGE

- Edgelit and backlit light projection design
- High quality aluminium material and LGP diffuser
- High luminous efficiency, upto 140lm/w optional
- Compliance with CE and CB standards

Edgelit 60X60 Panel



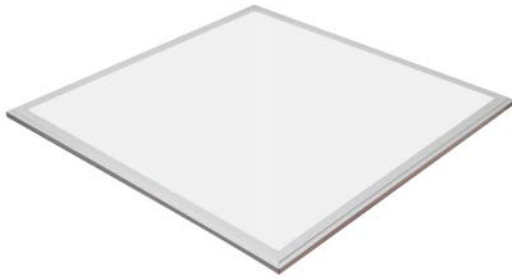


Figure 11.1

- 9 mm thickness panel/external thickness
- Uniform light/high lumen output
- High lumen SMD-CRI>80 upto 100lm/w
- Available in: recessed, ALM ceiling, suspended & surface mounted



220-240 VOLTAGE	100lm/WATTS
0.0%	IP 40
25000 HOURS	ON OFF ≥1250
Hz 50/60 HZ	120°
Ra ≥80	P.F. >0.9
NOT DIMMABLE	<1 se

CCT — 3000K 4000K 6000K

Backlit 60X60 Panel



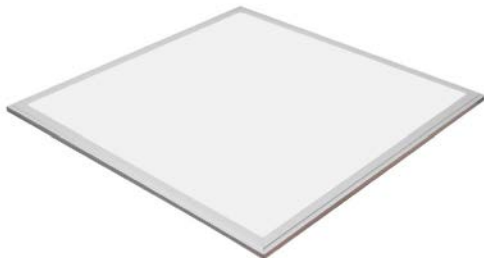


Figure 11.2

- Backlit LED panel with external driver spots
- SMD LED with optical lens
- Cost Effective/High efficiency
- Available in 100lm/w, 120lm/w & 140lm/w



100-240 VOLTAGE	100lm/WATTS
0.0%	IP 40
25000 HOURS	ON OFF ≥1250
Hz 50/60 HZ	120°
Ra ≥80	P.F. >0.9
NOT DIMMABLE	<1 se

CCT — 3000K 4000K 6000K

Model	Watts	Voltage	P.F	Lumen	Dimension(mm)	Hole size(mm)	Image Code
LTX40PL	40W	220-240V	>0.9	100lm/W	595X595	595	Figure 11.1
LTX48PL	48W	220-240V	>0.9	90lm/W	595X595	595	Figure 11.1
LTX48PLA	48W	220-240V	>0.9	90lm/W	600X600	600	Figure 11.1
PL48BS	48W	100-240V	>0.9	100lm/W	595X595	595	Figure 11.2
PL48BSAL	48W	100-240V	>0.9	100lm/W	600X600	600	Figure 11.2