

| Cable Ties



**SELF-LOCKING NYLON CABLE TIES**

**Material** : Nylon 66, 94v-2

**Operating temperature** : -40C to 85C

**Color** : Natural (or white,standard color), UV black & other colors are available as requested.

Item No	L		W mm	Max Bundle Dia.(mm)	Tensile Strength		Packing	
	inch	mm			LBS	KGS		
SC-60A	2 3/8"	60	2.5	11	18	8	100PCS & 1000PCS	
SC-80A	3 3/16"	80	2.5	16	18	8		
SC-100A	4"	100	2.5	22	18	8		
SC-120A	4 3/4"	120	2.5	30	18	8		
SC-150A	6"	150	2.5	35	18	8		
SC-160A	6 1/4"	160	2.5	40	18	8		
SC-200A	8"	200	2.5	50	18	8		
SC-120B	4 3/4"	120	3.6	30	40	18	100PCS & 500PCS	
SC-150B	6"	150	3.6	35	40	18		
SC-180B	7"	180	3.6	42	40	18		
SC-200B	8"	200	3.6	42	40	18		
SC-250B	10"	250	3.6	65	40	18		
SC-280B	11"	280	3.6	70	40	18		
SC-300B	11 5/8"	300	3.6	80	40	18		
SC-370B	14 1/2"	370	3.6	102	40	18		
SC-120C	14 3/4"	120	4.8	24	50	22		
SC-150C	6"	150	4.8	35	50	22		
SC-190C	7 1/2"	190	4.8	46	50	22		
SC-200C	8"	200	4.8	50	50	22		
SC-250C	10"	250	4.8	65	50	22		
SC-280C	11"	280	4.8	70	50	22		
SC-300C	11 5/8"	300	4.8	82	50	22		
SC-350C	13 3/4"	350	4.8	90	50	22		
SC-370C	14 1/2"	370	4.8	102	50	22		
SC-400C	15 3/4"	400	4.8	105	50	22		
SC-450C	17 3/4"	450	4.8	130	50	22		
SC-500C	19 11/16"	500	4.8	140	50	22		
SC-530C	20 4/5"	530	4.8	147	50	22		
SC-250DS	10"	250	6.8	65	90	40		
SC-300DS	11 5/8"	530	6.8	80	90	40		
SC-370DS	14 1/2"	370	6.8	102	90	40		
SC-150D	6"	150	7.6	33	120	55		100PCS
SC-200D	8"	200	7.6	50	120	55		
SC-250D	10"	250	7.6	63	120	55		
SC-300D	11 5/8"	300	7.6	82	120	55		
SC-350D	13 3/4"	350	7.6	90	120	55		
SC-370D	14 1/2"	370	7.6	102	120	55		
SC-400D	15 3/4"	400	7.6	105	120	55		
SC-450D	17 3/4"	450	7.6	118	120	55		
SC-500D	19 11/16"	500	7.6	150	120	55		
SC-550D	21 11/16"	550	7.6	160	120	55		
SC-430DL	17"	430	9	112	175	80		
SC-550DL	21 11/16"	550	9	160	175	80		
SC-650DL	25 9/16"	650	9	190	175	80		
SC-760DL	30"	760	9	225	175	80		
SC-810DL	32"	810	9	239	175	80		
SC-920DL	36 1/4"	920	9	265	175	80		
SC-1168DL	46"	1168	9	360	175	80		
SC-550FL	21 11/16"	550	12.7	160	250	114		



| PG Thread Cable Gland



**PG THREAD CABLE GLAND**

**Material** : Nylon66,94V-2 and tight ring from rubber.

**Features** : Special designation, good strength aile and none damage to electrical machine. No need to dismantle the fix terminal, cable can be inserted through directly then tighten easy and save time.

**Application** : Used for machinery control box, distribution plate, machine and electrical. etc.

Part No.	L1mm	Cable Range (mm)	Lmm	Spanne Size (mm)	L2mm
SC-PG07	8	3-6.5	22	16	12
SC-PG09	8	4-8	26	19	16
SC-PG11	8	5-10	27	22	18
SC-PG13.5	9	6-12	28	24	20
SC-PG16	10	10-14	30	27	22
SC-PG19	10	12-15	30	27/28	24
SC-PG21	10	13-18	35	33	28
SC-PG25	11	16-21	34	35/36	30
SC-PG29	12	18-25	40	41/42	37
SC-PG36	14	22-32	48	52/53	47
SC-PG42	14	32-38	49	60/61	54
SC-PG48	14	37-44	50	64/65	59
SC-PG63	27	42-50	60	72	70



**METRIC THREAD CABLE GLAND**

Part No.	L1mm	Cable Range (mm)	Lmm	Spanne Size (mm)	L2mm
SC-M12	8	3-6.5	22	16	12
SC-M14	8	4-8	26	19	14
SC-M16	8	5-10	27	22	16
SC-M18	8	5-10	27	22	18
SC-M20	9	6-12	28	24	20
SC-M22	10	10-14	30	27	22
SC-M24	10	12-15	30	27	24
SC-M25	10	13-18	35	33	25
SC-M27	10	13-18	35	33	27
SC-M30	11	12-21	34	35/36	30
SC-M32	11	12-21	34	36/37	32
SC-M36	12	18-25	40	41/42	36
SC-M40	14	22-32	48	52/53	40
SC-M50	14	32-38	49	60/61	50
SC-M63	14	37-44	50	67	63



**EXPAND NAIL**

**Material** : PE

**Color** : White, Grey.

Part No.	Item No.	L(mm)	D(mm)	d(mm)	Packing
01101	SC-EN-06	29.8	6.0	4.9	1000PCS & 100PCS
01102	SC-EN-08	38.6	7.9	5.3	
01103	SC-EN-10	42.7	9.9	5.8	500PCS & 100PCS
01104	SC-EN-12	47.9	11.6	6.3	



## | Terminal Blocks




**TERMINAL BLOCKS**

U(w) V(f) Terminal Blocks U(w) V(f) Type

**Terminal Blocks** : U(w) V(f) Terminal Blocks U(w) V(f) Type

**Material** : PE

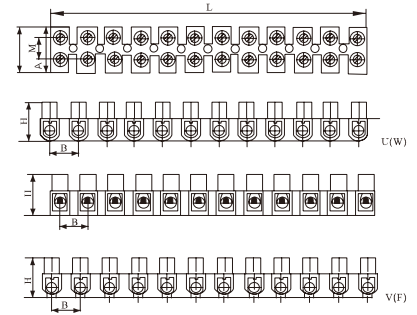

Item No	L	W	H	A	B	mm2	Volt	AMP	Packing
SC-3A	93	16	12	6	8	4	400V	3A	10PCS
SC-6A	115	15.7	13	6.5	9.5	6	400V	6A	
SC-10A	126	20.2	15.5	8.4	10.5	10	400V	10A	
SC-16A	139	23	17.7	10.3	12	12	400V	16A	
SC-20A	155	25	19.2	11.5	13.5	14	400V	20A	
SC-30A	171	26	20.5	12	14.5	16	400V	30A	
SC-60A	192	30	26	13.5	16.5	25	400V	60A	
SC-80A	205	33	27	15	17	35	400V	80A	
SC-100A	250	46	31	22	21	40	400V	140A	



**CABLE PULLER**

**STEEL CABLE PULLER WITH 2 RINGS**

Part No.	LTH	THK
SCPS-10	10Mtr.	2.5mtr
SCPS-15	15tr.	2.5mtr
SCPS-20	20Mtr.	2.5mtr
SCPS-25	25Mtr.	2.5mtr
SCPS-30	30Mtr.	2.5mtr
SCPS-50	50Mtr.	2.5mtr



**STEEL BENDING SPRINGS**

Part No.	LTH	Dia.
SCBS-20	500mm	20mm
SCBS-25	500mm	25mm
SCBS-32	500mm	32mm



**TIE MOUNT**

**Material** : Nylon 66, 94v-2, certified by UL. The back sponge glue imported

Part No	Item No	L	W	H	Tapping hole	Perforation	Packing
01201	SCP-20	20	20	6.1	2.9	5.0	100PCS
SC-4MM	SCP-25	25	25	7.5	3.5	6.2	
SC-5MM	SCP-30	30	30	8.7	4.5	6.4	
SC-6MM	SCP-40	40	40	6.4	4.5	10.8	



**WIRE CLIPS**

PE (White, Grey), elasticity and shock resisting. Inserting type, nail attached in clips, save time and cost.

Item No	HSRA(mm) HSR	B(mm)	(Nail)mm	PS	Packing
SC-0305MM	5.3	3.5	2x19	HSC-0.35	100PCS
SC-4MM	5.3	4	2.3x18	HSC-0.4	
SC-5MM	6.3	5	2.3x18	HSC-0.5	
SC-6MM	7.4	6	2.3x22	HSC-1	
SC-7MM	8.4	7	2.3x22	HSC-1.5	
SC-8MM	9.4	8	2.3x22	HSC-2	
SC-9MM	10.4	9	2.3x22	HSC-2.5	
SC-10MM	11.4	10	2.3x27	HSC-3	
SC-12MM	13.4	12	2.3x25	HSC-4	
SC-14MM	16.4	14	2.3x30	HSC-6	
SC-16MM	17.7	16	2.4x32	HSC-7	
SC-18MM	19.7	18	2.7x40	HSC-7.2	
SC-20MM	22.2	20	3x42	HSC-7.5	
SC-22MM	25	22	3x42	HSC-8	
SC-25MM	27.7	25	3x45	HSC-9	
SC-30MM	33.1	30	3.5x55	-	
SC-32MM	35.6	32	3.5x55	HSC-10	
SC-35MM	36.6	35	3.5x58	-	
SC-40MM	45.2	40	3.5x62	-	



**SPIRAL WRAPPING BAND**

**Material** : PE

**Usage** : Fix one and with safely belt first, then circle the wires clockwise to tighten

**Application** : A protection wear for electric wires, and make them insulation and look nice

**Colours** : White & Black

Part No	Item No	d	D	Screw-pitch	Banding Range(mm)	Packing
01701	SWB-06	4	6	7.0	4-50	10M/ROLL
01702	SWB-08	6	8	10.8	6-60	
01703	SWB-10	7.5	10	11.4	7.5-60	
01704	SWB-12	9	12	13.9	9-65	
01705	SWB-15	12	15	15.0	12-75	
01706	SWB-19	15	19	18.2	15-100	
01707	SWB-24	20	24	19.6	20-130	



**HEAT SHRINKABLE SLEEVES**

Function:

1. Wire coat insulation
2. Make the joint of terminal block and wire insulated
3. Divide the colors
4. Water-proof
5. Protection and insulation of insitors and electrical capacitors. Standard color: black, white, red, yellow, green, grey, orange, and yellowgreen.

Part No	Before Contraction		After Contraction		Packing
	d(mm)	Thickness	d(mm)	Thickness	
SCHS-1	1.0	0.2±0.05	0.5	0.4±0.05	200
SCHS-1.5	1.5	0.2±0.05	0.75	0.4±0.05	
SCHS-2	2.0	0.25±0.05	1.0	0.45±0.1	
SCHS-2.5	2.5	0.25±0.05	1.25	0.45±0.1	
SCHS-3	3.0	0.25±0.05	1.5	0.45±0.1	
SCHS-3.5	3.0	0.25±0.05	1.5	0.45±0.1	
SCHS-4	3.5	0.25±0.05	1.75	0.45±0.1	
SCHS-5	4.0	0.25±0.05	2.0	0.45±0.1	100
SCHS-6	5.0	0.35±0.05	2.5	0.55±0.1	
SCHS-7	6.0	0.35±0.05	3.0	0.55±0.1	
SCHS-8	7.0	0.35±0.05	3.5	0.55±0.1	
SCHS-9	8.0	0.35±0.05	4.0	0.55±0.1	
SCHS-10	9.0	0.35±0.05	4.5	0.55±0.1	
SCHS-11	10.0	0.35±0.05	5.0	0.6±0.1	
SCHS-12	11.0	0.35±0.05	5.5	0.6±0.1	
SCHS-13	12.0	0.35±0.1	6.0	0.7±0.1	
SCHS-14	13.0	0.35±0.1	6.5	0.7±0.1	
SCHS-15	14.0	0.35±0.1	7.0	0.7±0.1	50
SCHS-16	15.0	0.35±0.1	7.5	0.7±0.1	
SCHS-17	16.0	0.35±0.1	8.0	0.7±0.1	
SCHS-18	17.0	0.35±0.1	8.5	0.7±0.1	
SCHS-20	18.0	0.4±0.1	9.0	0.8±0.1	
SCHS-22	20.0	0.5±0.1	10.0	0.9±0.1	
SCHS-25	22.0	0.5±0.1	11.0	0.9±0.1	
SCHS-28	25.0	0.5±0.1	12.5	0.9±0.1	25
SCHS-30	28.0	0.5±0.1	14.0	0.9±0.1	
SCHS-35	30.0	0.5±0.1	15.0	1.0±0.2	
SCHS-40	35.0	0.5±0.1	17.5	1.0±0.2	
SCHS-50	40.0	0.5±0.1	20.0	1.0±0.2	
SCHS-60	50.0	0.5±0.1	25.0	1.0±0.2	
SCHS-70	60.0	0.6±0.1	30.0	1.2±0.2	
SCHS-80	70.0	0.6±0.1	35.0	1.2±0.2	
SCHS-90	80.0	0.6±0.1	40.0	1.2±0.2	
SCHS-90	90.0	0.6±0.1	45.0	1.2±0.2	
SCHS-100	100.0	0.7±0.1	50	1.3±0.2	
SCHS-120	120.0	0.7±0.1	60	1.3±0.2	

